

GENERAL DESCRIPTION




Flow automatically reverses direction from P-A to P-B when the setting value of pressure relief valves is reached.

- ✓ 4/2- way directional control valves with hydraulic pilot operation

- ✓ Manual override option

- ✓ Reliability and long life

- ✓ Mounting surface CETOP3 (NG6)

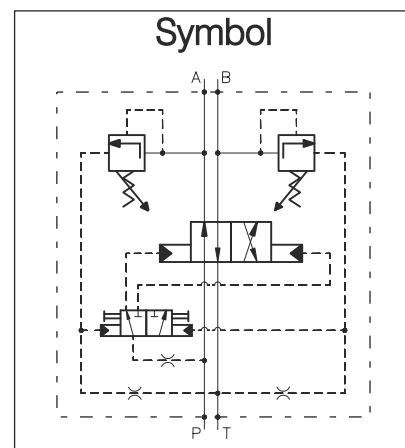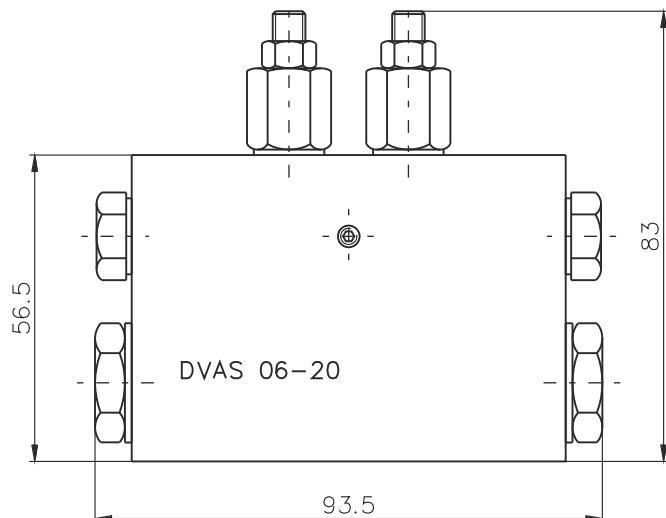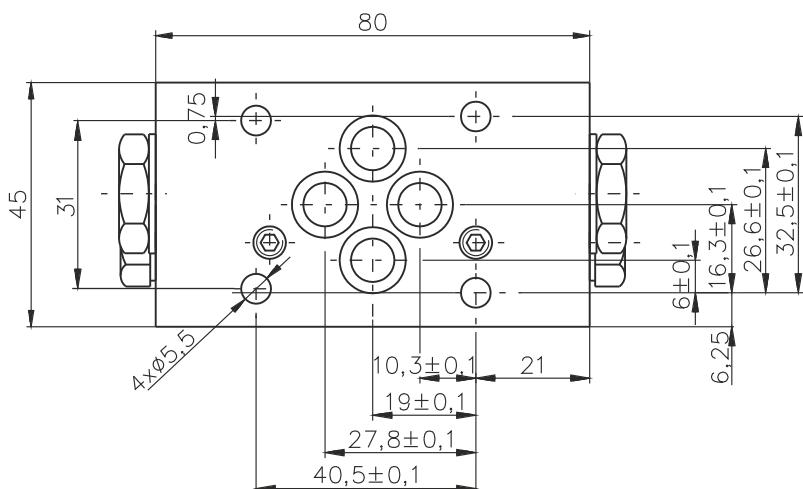

ORDERING CODE

DVAS | 06 - 20 ...

Automatic switch
directional control
valve

Nominal size

Pressure range:

Omit - 50...200bar.
V1 - 0...100bar.

Direction of flow(symbol 20)



AUTOMATIC SWITCH DIRECTIONAL CONTROL VALVE

DVAS06-20

TECHNICAL DATA

GENERAL



DATA	UNIT	VALUE/RANGE
Installation position		preferably horizontal
Max. ambient temperature	°C	-20...+50
Weight	kg	1,400

HYDRAULIC

Max. pressure	MPa	21
Maximum flow	l/min	30
Minimum flow	l/min	4
Hydraulic fluid - mineral oil: -viscosity -filtration degree -temperature	mm ² /s mm °C	10...800 0.025 -20...80

CHARACTERISTICS

$\Delta p/Q$

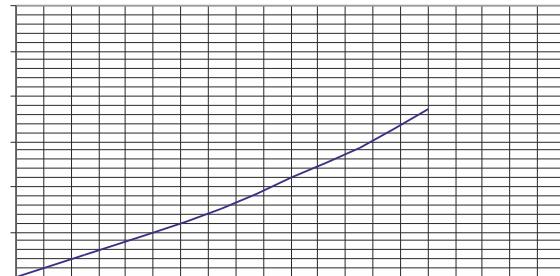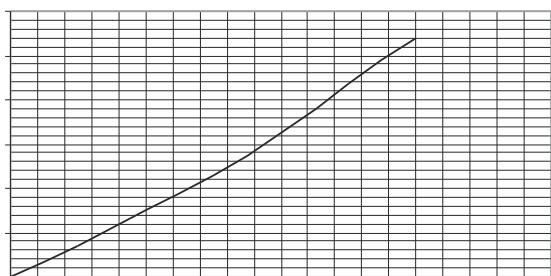

DCVC3-1-Jan 2013